


Imbornal

R0954

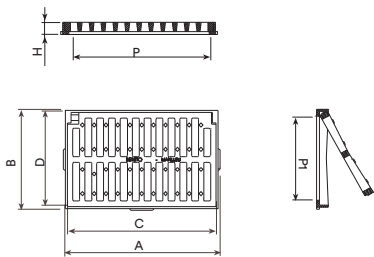

REF.		A	B	C	D	H	P	P1	dm2	UN.
R0954	250KN	570 mm	370 mm	535 mm	335 mm	35 mm	500 mm	300 mm	8	80

Imbornal está diseñada para soportar un tráfico suave. Perfecta para instalar en vías con una IMD de < 500, especialmente en arcenes y cunetas.

- Realizada en fundición dúctil, en gráfico esferoidal, según ISO 1083 (Tipo 500-7) y norma EN 1563.
- Articulada antirrobo.
- Superficie metálica antideslizante.
- Revestida con pintura negra, no tóxica, no inflamable y no contaminante.

Imbornal est conçu pour supporter un trafic modéré. Parfait pour installation sur voies ayant un TMJ de < 500, notamment sur accotements et caniveaux.

- Fabriqué en fonte ductile à graphite sphéroïdal, conformément aux normes ISO 1083 (Type 500-7) et EN 1563.
- Articulation antivol.
- Surface métallique antidérapante.
- Revêtement en peinture noire, non toxique, ininflammable et écologique.

Imbornal is designed to support soft traffic. Perfect for installing on roads with an ADT of < 500, particularly hard shoulders and ditches.

- Made from spheroidal graphite ductile cast iron, according to ISO 1083 (Type 500-7) and standard EN 1563.
- Hinged theft-proof cover.
- Metal non-slip surface.
- Coated with non-toxic, non-flammable and non-polluting water-soluble black paint.