




Variantes | Variantes | Alternatives




UM305



UM302

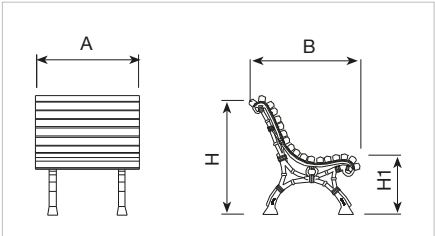

Ref.	A	B	H	H1
UM305	2000 mm	700 mm	785 mm	440 mm
UM305S	540 mm	700 mm	785 mm	440 mm
UM302	540 mm	700 mm	785 mm	440 mm



Pies de fundición dúctil con acabado imprimación epoxi y pintura poliéster en polvo color negro forja. Tablones de sección 40 x 35 mm de madera tropical tratada con Lignus, protector fungicida, insecticida e hidrófugo. Acabado color caoba. Tornillos de acero inoxidable. Anclaje recomendado: Tornillos de fijación al suelo de M10 según superficie y proyecto. Opcional: Se puede suministrar madera con certificado FSC o PEFC.

Piètement en fonte ductile avec finition couche primaire époxy et thermolaquage polyester noir de forge. Lattes de bois tropical de section 40 x 35 mm traité avec Lignus protecteur fongicide, insecticide et hydrofuge. Finition teinte acajou. Vis en acier inoxydable. Ancrage recommandé : vis M10 pour la fixation au sol, en fonction de la surface et du projet. En option : bois certifié FSC ou PEFC.

Ductile iron legs with epoxy primer coating and black wrought iron coloured polyester powder coated finish. Tropical wood boards measuring 40 x 35 mm, treated with Lignus, a fungicide, insecticide and waterproofing agent. Mahogany colour finish. Stainless steel bolts. Recommended anchoring: M10 bolts to anchor to the ground, depending on the surface and the project. Optional: FSC- or PEFC-certified wood can be supplied.

