


Kube Luz Plus

UM372LPL

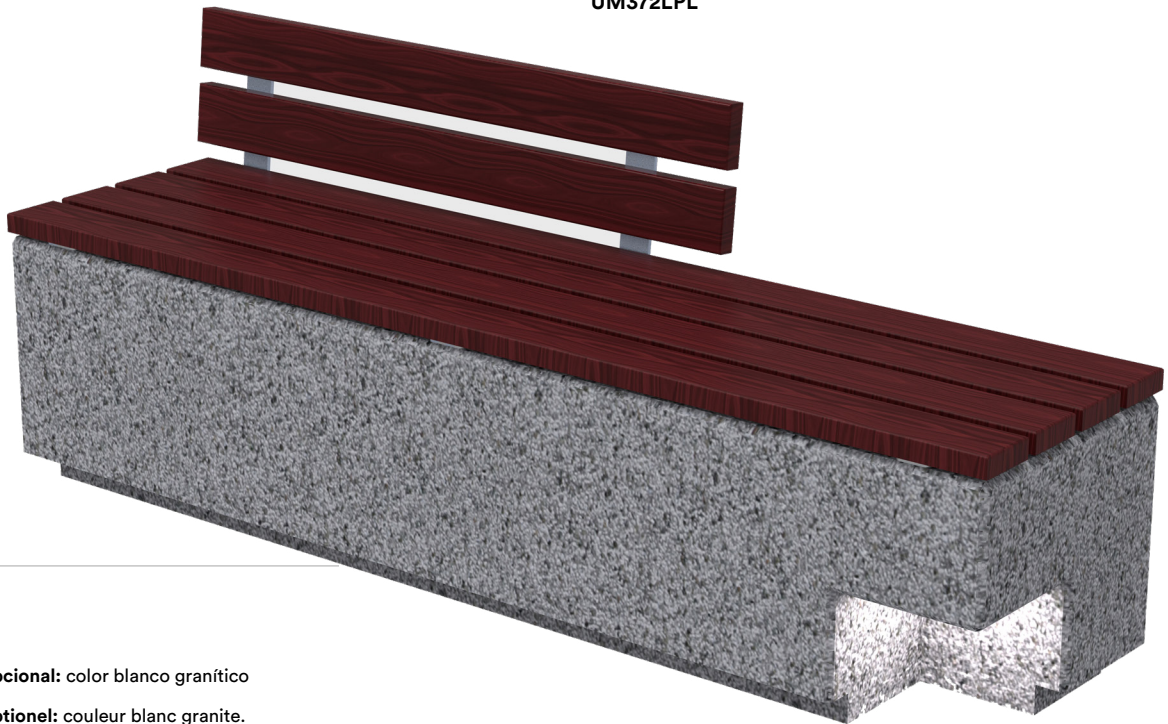

Opcional: color blanco granítico

Optionel: couleur blanc granite.

Optional: granite white concrete

Variantes | Variantes | Alternatives



UM372

UM372S

UM348S

UM372LM

UM372LP

UM372SLM



UM372SLP

UM372L

UM372LML

UM372SK

Ref.	A	B	B1	H
UM372	2000 mm	500 mm	-	450 mm
UM372S	500 mm	500 mm	-	450 mm
UM348S	Ø 580 mm	-	-	450 mm
UM372LM	2000 mm	500 mm	-	490 mm
UM372LP	2000 mm	500 mm	-	775 mm
UM372SLM	500 mm	500 mm	-	490 mm
UM372SLP	500 mm	500 mm	-	775 mm
UM372L	2000 mm	500 mm	-	450 mm
UM372LML	2000 mm	500 mm	-	775 mm
UM372LPL	2000 mm	500 mm	-	490 mm
UM372SK	500 mm	490 mm	418 mm	450 mm

Hormigón prefabricado color gris granítico de aspecto rugoso. Se puede colocar en elementos aislados o en grupos. Anclaje recomendado: Apoyado por su propio peso.

Baliza empotrada en el banco, material cuerpo: aluminio, material del difusor: cristal matizado, acabado en acero inoxidable. Lámpara LED con potencia de 4,5W, alimentación de 220V-240V AC, equipo electrónico, Clase 1, IP:65, IK:09, temperatura de color: 3000k.

Béton préfabriqué couleur gris granite d'aspect rugueux. Possibilité de placer les éléments isolés ou en groupe. Fixation recommandée: Par son propre poids.

Balise encastrée dans le banc. Matériel carcasse: aluminium, matériel du diffuseur: verre mate, finition en acier inoxydable. Lampe LED avec puissance de 4,5W, alimentation de 220V-240V AC, équipement électronique, Classe I, IP:65, IK:09, température de couleur: 3000k.

Pre-cast textured granite grey concrete. Designed to be both installed as a standalone product or in groups. Recommended anchoring: freestanding.

Embedded Beacon within the bench. Body made of aluminium. Diffuser made of frosty glass. Stainless steel finish. LED lamp with a 4,5W output, input voltage 220V-240V AC, electronic control gear, Class I, IP65, IK09, colour temperature: 3000K.

Otros productos | Autres produits | Other products



PA672

PA672S

PA673

H372

H373

UM372M



UM1372

UM1373

UM1673

